


## Operating the Kelmar Make-up Table.



Before operating, the speed control must be turned to the off position, that is as far anti-clockwise as you can, and the switches should be set as seen below:

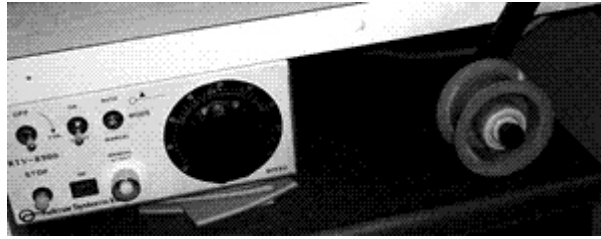

Run the film under the arm (seen in the top picture) and onto the take up spool or bobbin. Then lift the arm, as seen below to 'cock' the safety mechanism, this will automatically stop the motor if the film goes loose.



Then turn on the speed.....